

EST 16






SPECIFICATION

FL 1 STANDARD		High	Medium	Low	ECO	Strobe
	Output	1600LM	700LM	300LM	20LM	1600LM
	Distance	550m	288m	138m	55m	—
	Intensity	55,250cd	25,500cd	10,000cd	750cd	—
	Runtime	0.5H	1H	3H	43H	—
	LED	1*Luminus SFT25R				
	Lens	Glass with double-sided anti-reflective coating				
	Battery Source	1*18350				
	Impact Distance	1.5m				
	Waterproof	IP68(underwater 2m)				
	Material	Aerospace 6061 Aluminum Alloy				
	Finish	Premium Type III Hard-anodizing				
	Dimension	106.5(Length)*30(Head)*23.58(Tube)mm				
	Net Weight	87.7g(exclude the battery)				



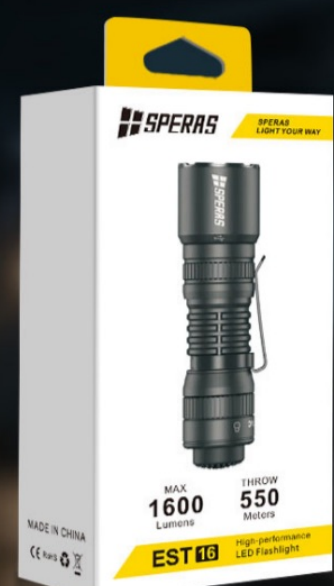

INSIDE THE BOX



1* flashlight



1* 18350 battery




1* USB-C cable



1* Tactical Ring



2* O-ring
1* Lanyard



1* Manual