
EST Plus V3



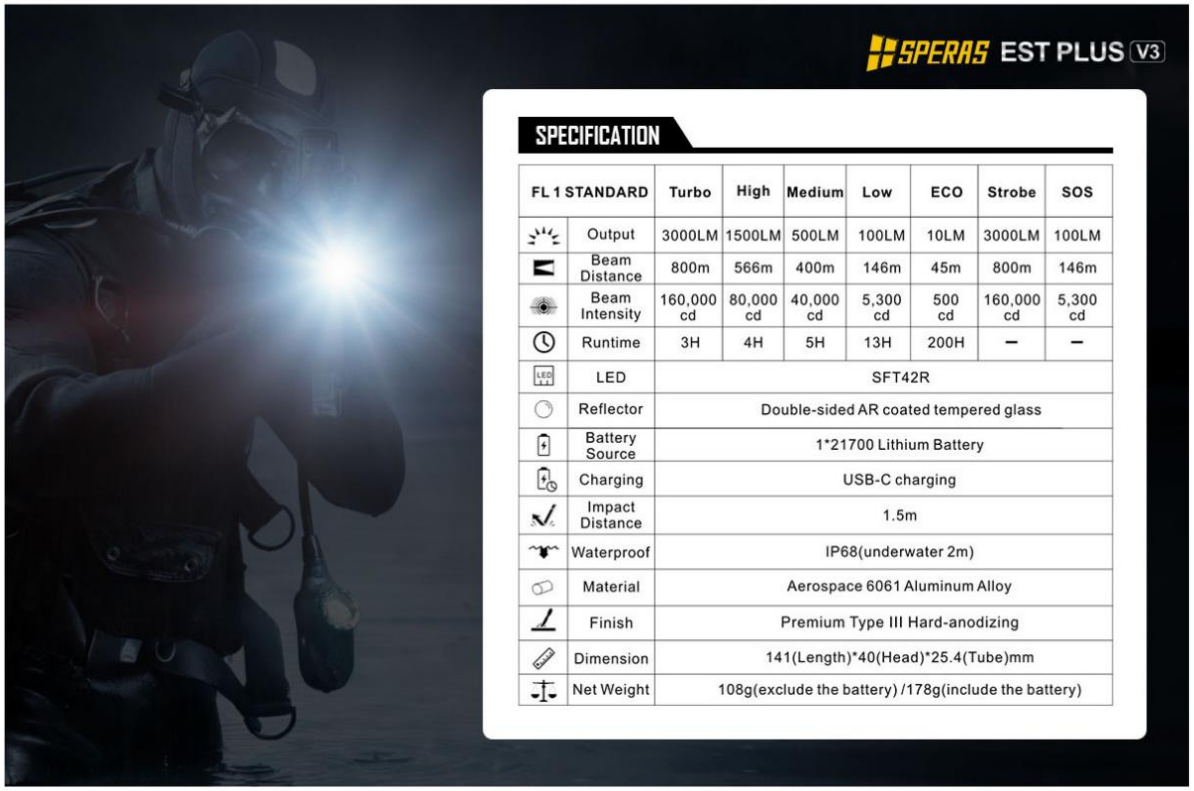

SPECIFICATION

FL 1 STANDARD		Turbo	High	Medium	Low	ECO	Strobe	SOS
	Output	3000LM	1500LM	500LM	100LM	10LM	3000LM	100LM
	Beam Distance	800m	566m	400m	146m	45m	800m	146m
	Beam Intensity	160,000 cd	80,000 cd	40,000 cd	5,300 cd	500 cd	160,000 cd	5,300 cd
	Runtime	3H	4H	5H	13H	200H	–	–
	LED	SFT42R						
	Reflector	Double-sided AR coated tempered glass						
	Battery Source	1*21700 Lithium Battery						
	Charging	USB-C charging						
	Impact Distance	1.5m						
	Waterproof	IP68(underwater 2m)						
	Material	Aerospace 6061 Aluminum Alloy						
	Finish	Premium Type III Hard-anodizing						
	Dimension	141(Length)*40(Head)*25.4(Tube)mm						
	Net Weight	108g(exclude the battery) /178g(include the battery)						